

SS-PIR-SW-01 Surface-Mount PIR Switching Sensor

The SS-PIR-SW-01 is a PIR-triggered switch suitable for mounting onto a back box or solid surface. It allows simple selection of presence or absence detection to control both lighting and nonlighting loads.

Configurable for any room occupancy style, it switches on the connected load if the area is occupied and the illuminance is lower than the specified level (with the photocell activated).


Similarly, it switches off the load if the area is unoccupied for the set time.

In absence mode, the unit can also be operated from a mains-rated retractable wall switch.

The SS-PIR-SW-01 has the following main elements:

- A mode selector with the following options:
 - Presence: auto on, auto off
 - Absence: manual on, auto off
- Absence: manual on, auto off
- A time adjuster (up to 40 min).

By setting the illuminance threshold adjuster to the maximum point, the unit is also suitable for nonlighting loads.

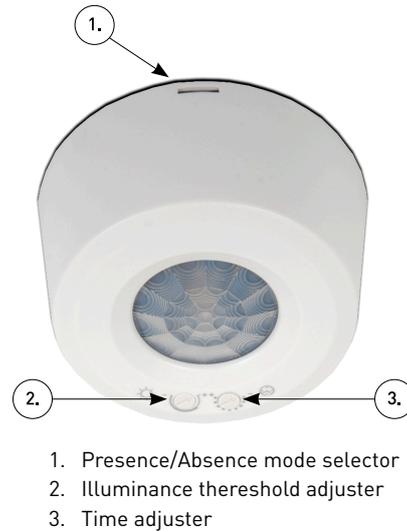

Key Features

- Easily selectable presence or absence detection.
- Provides load control in response to changes in room occupancy and illuminance.
- Simple out-of-the-box operation.
- Energy saving.

Operation

Presence Mode (Default Mode)


Out of the box, the time-out adjuster is set to 10 s, and the illuminance threshold adjuster is set to maximum (photocell inactive). With the illuminance threshold adjuster set to maximum, the sensor will always switch on the connected load when movement is detected. There are nine time periods available from the time-out adjuster (from 10 s to 40 min).

Multiple sensors can be connected to the same load in order to extend the detection zone (see 'Multiple sensors' on page 2).


Absence Mode

With the mode selector set to absence detection mode, pressing a retractable switch connected to the sensor will switch on the connected load. Then, if no presence is detected for the selected time period, or if the retractable switch is pressed shortly, the load will be switched off.

Detection Pattern

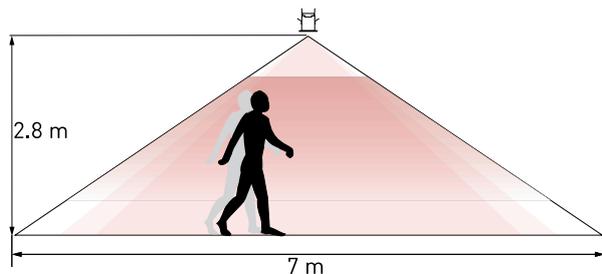


Illuminance and Time Settings

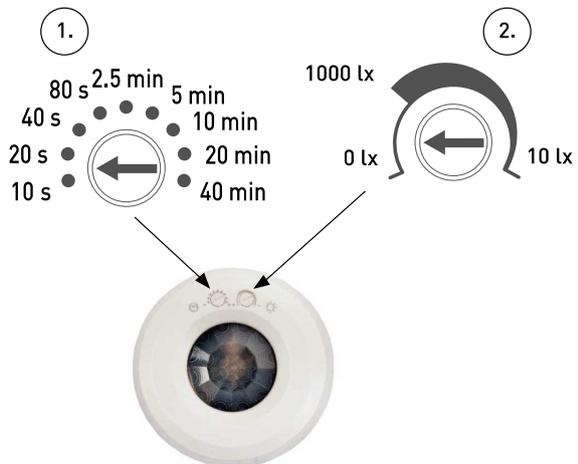


1. Time adjuster
2. Illuminance threshold adjuster

Dimensions (mm)

Sensor head

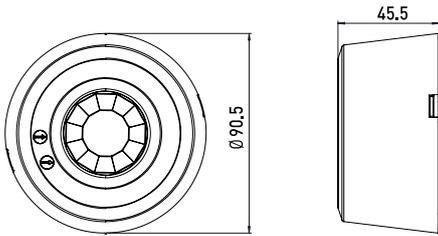


Back mounting plate

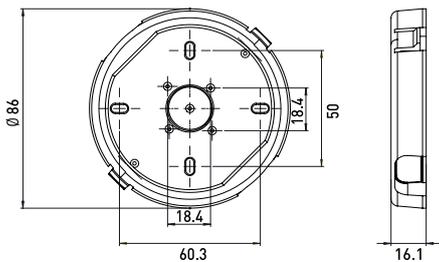

Connections

Single sensor

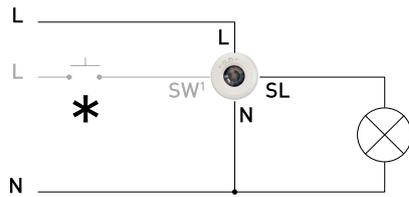

*: Mains-rated retractable wall switch ~230 VAC
Only available in absence mode.

L: Live in


N: Neutral in

SW¹: Switch input (only in absence mode)

SL: Switched live

Multiple sensors

(Presence detection mode only)

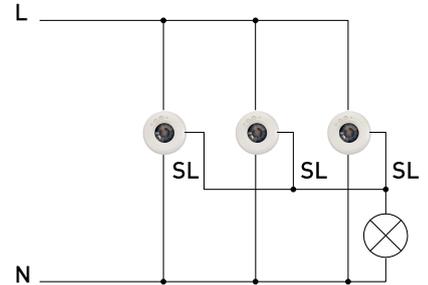

Technical Data

Electrical data

External power:	Terminal block
Wire section:	0.5 mm ² – 2.5 mm ² solid or stranded
Cable rating:	All cables must be mains rated.
Mains supply:	230 VAC, 50 Hz
Loads:	6 A resistive (e.g. heater)
	4 A incandescent
	3 A fluorescent ballast / LED driver
	1 A inductive (e.g. fan/motor)
	Mains LED lamps: Equivalent to 1000 W halogen light output
	Min. load: 2 W resistive, suitable for most energy saving lamps, LEDs and emergency fittings.
External protection:	6 A maximum (MCB or fuse)
Illuminance:	10 lx to 1000 lx, or photocell inactive.

Mechanical data

Mounting hole diameter:	50 mm
Diameter:	86 mm
Material (casing):	Flame-retardant polycarbonate
Finish / Colour:	Matt / White RAL9003
Weight:	102 g
IP code:	IP20

Operating conditions

Ambient temperature:	+10 °C to +35 °C Note: The temperature difference between the detection target and the background must be at least 4 °C.
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	-10 °C to +70 °C

Sensors

Presence detector:	PIR (Passive InfraRed)
Detection range:	360° with up to 7 m diameter when mounted at a 2.8 m ceiling height
Time range:	10 s to 40 min

Version information

Hardware version:	Rev. 1
-------------------	--------

Conformity and standards

Conformity:	
EMC emission:	EN60669-2-1:2004 inc A12:2010
EMC immunity:	EN60669-2-1:2004 inc A12:2010
Safety:	EN60669-2-1:2004 inc A12:2010
Environment:	Complies with WEEE and RoHS directives.