


325D2 Multisensor High Bay DALI-2 R60

The 325D2 Multisensor High Bay is a luminaire-based DALI-2 sensor that combines a PIR sensor for movement detections and a light sensor for constant light output. This sensor complies to the DALI-2 parts 303 and 304 and follows the Zhaga Book 20 mechanical dimensions for a rectangular sensor which suits to a 60 mm x 22 mm slot on a luminaire.

This sensor can be used with a Helvar DALI-2 multi-master lighting control solution, such as the Helvar 950 Router.

Key Features


- Small luminaire based DALI-2 high bay multisensor
- Fits to a standard Zhaga Book 20 based rectangular 60 mm x 22 mm (+/- 0.2 mm tolerance) luminaire slot
- 10 mA DALI current consumption
- DALI-2 certified input device

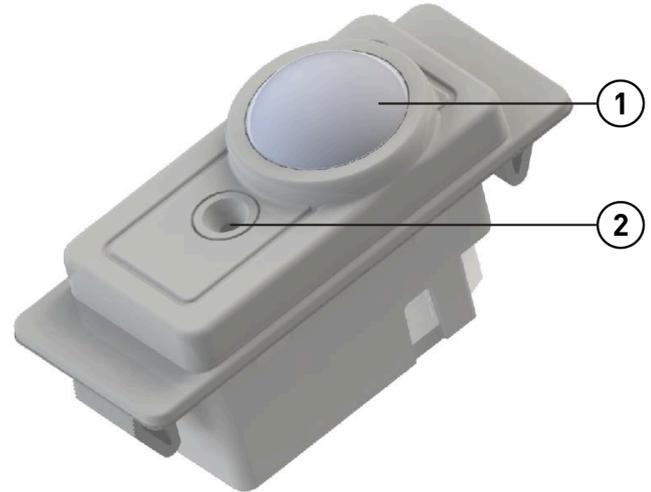


1. PIR sensor
2. Light sensor

Sensor Detection Coverage

Presence detection - Passive infrared (PIR)

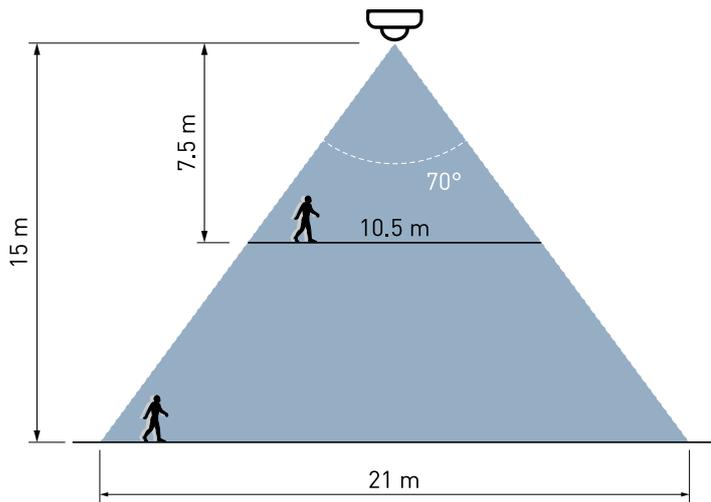


Detection pattern at floor level for 15 m mounting height

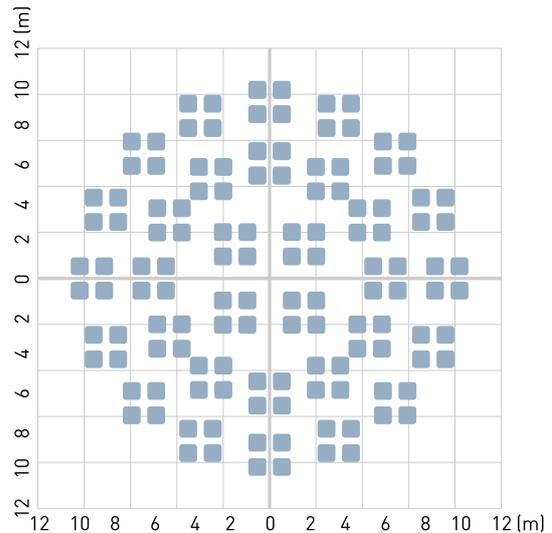


Detection range and sensitivity depends on the speed and size of the moving object as well as its temperature difference to the surroundings. Moving directionally towards the sensor will give worse detection than crossing the detection area on an angle.

Connections

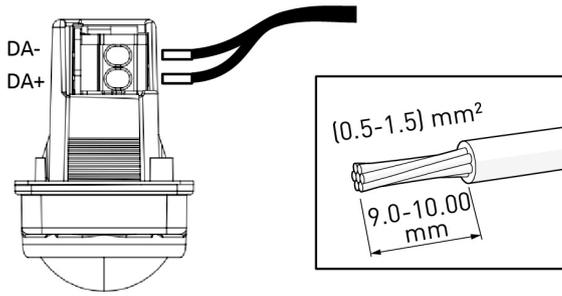

Note: To remove DALI wiring, press down the release button.


Dimensions (mm)

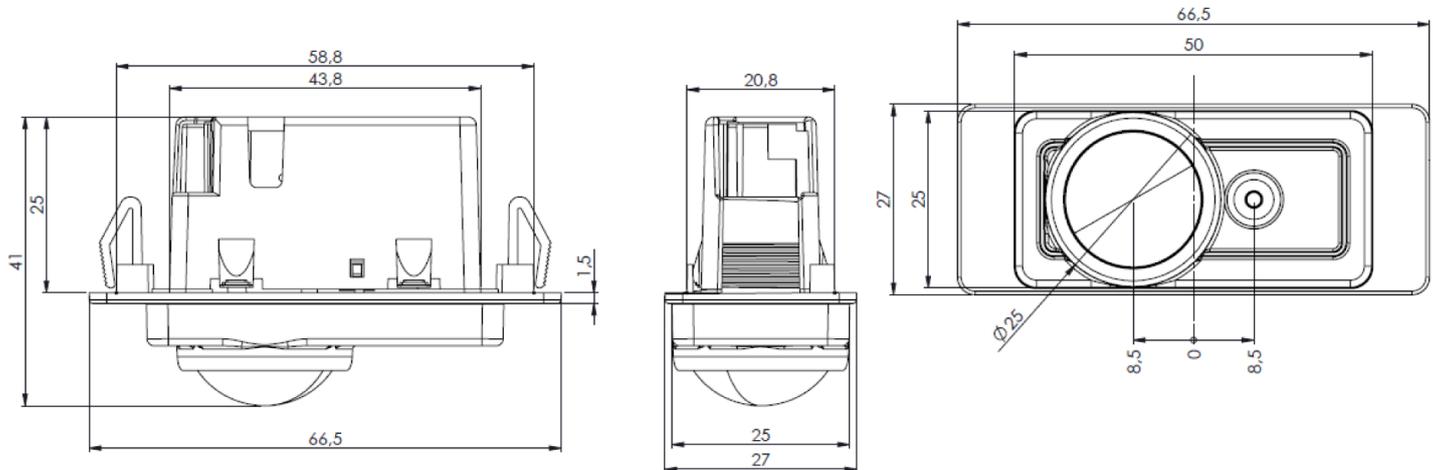

Mounting


325 Multisensor can be mounted to a luminaire following the Zhaga Book 20 rectangular 66 mm x 22 mm (+/- 0.2 mm) sized luminaire slot or using the batten mountable holder accessory in the following ways.

1. Rectangular hole for mounting from outside the luminaire inwards (recommended)

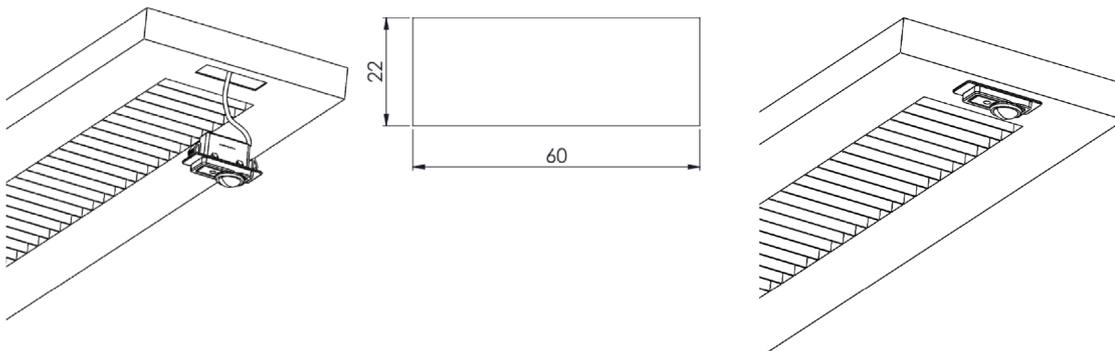

Carefully push the unit into the cutout until it 'clicks' into place and sits flush with the luminaire casing. Supported luminaire frame thickness in the range $0.4 \leq d \leq 1.5$ mm.


2. Rectangular hole for mounting from inside the luminaire outwards - 51 mm x 26 mm (+/- 0.2 mm)

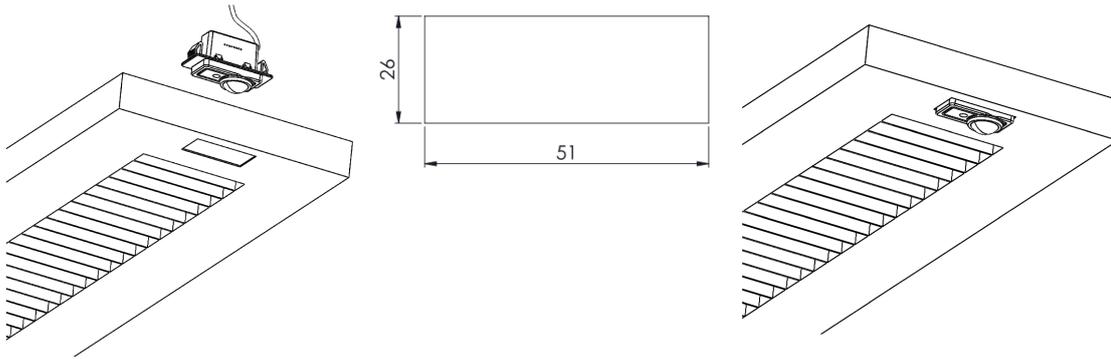

Ensure the face of the unit sits level with the luminaire casing and secure the unit in place.


 Note: For IP65 units. Ensure the rating is met when the sensor is mounted from inside the luminaire. The sensor has no seal on the outside surface.

3. 5696G - R60 Sensor Holder Batten Mount accessory (sold separately)

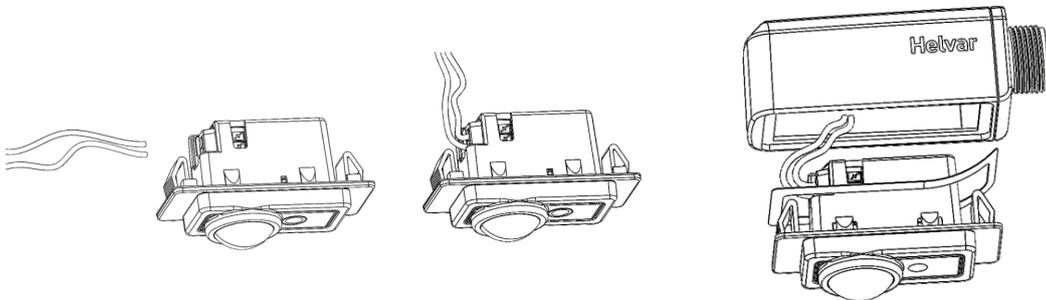


a) Connect DALI wires.

b) Remove the tape liner and feed the wires through the holder.

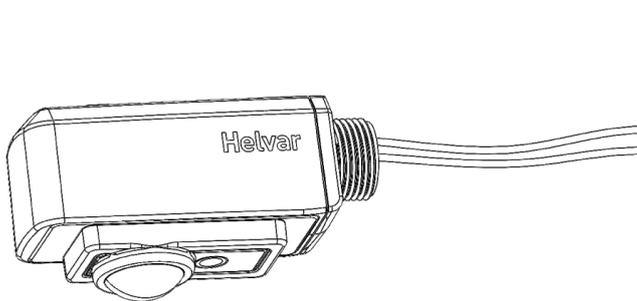

c) Push the unit into the holder.

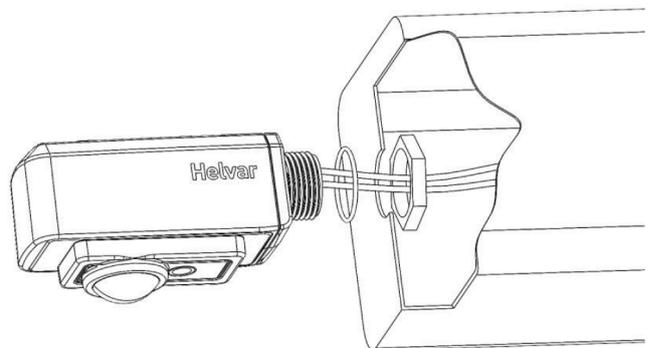

d) Feed the wires through the hole in the luminaire, connect them and fasten the holder to the luminaire using the O-ring and a M20 nut.

Technical Data

| Connections | |
|---------------|---|
| DALI: | Push-fit terminals for the DALI wires. |
| Wire section: | 0.5 mm ² – 1.5 mm ² solid or stranded |
| Cable rating: | All cables must be mains rated. |

| Electrical data | |
|--------------------|-----------------|
| DALI supply input: | 12.0 V – 22.5 V |
| DALI consumption: | 10 mA Max |

| Movement detection sensor | |
|-----------------------------------|--|
| Technology: | Passive infrared (PIR) detects moving temperature differences |
| Detection coverage area: | 346 m ² @ 15 m mounting height 87 m ² @ 7 m mounting height achieved with: - 8 C° temperature difference to target - 1.0 m/s movement speed - 700 x 250 mm object size |
| Max. recommended mounting height: | 17 m |

| Light sensor | |
|--------------|-----------------------------|
| Technology: | Closed loop reflected light |
| Illuminance: | 5 lx to 5000 lx |

| Operating and storage conditions | |
|----------------------------------|---|
| Operating temperature: | 0 °C to +50 °C Note: The temperature difference between the detection target and the background must be at least 4 °C. |
| Relative humidity: | Max. 85 %, noncondensing |
| Storage temperature: | -20 °C to +70 °C |

| Mechanical data | |
|--------------------|-----------------------------|
| Dimensions: | 66.5 mm x 27 mm x 41 mm |
| Material (casing): | Fire-retardant PC/ABS blend |
| Colour: | Grey (RAL 7035) |
| IP rating: | IP65 front, IP20 back |
| Weight: | 19 g |

| Conformity and standards | |
|--------------------------|---|
| Conformity: | |
| EMC emission: | EN 55015 |
| EMC immunity: | EN 61547 |
| Safety: | EN 61347-2-11 |
| Environment: | Complies with WEEE and RoHS directives. |
| DALI: | IEC 62386, Parts 101, 103, 303 and 304 |

| Order code | |
|------------|--------------------------------------|
| 325GD2 | Multisensor DALI-2 R60 High Bay Grey |
| 5696G | R60 Sensor Holder Batten Mount |