



1 Channel Relay Unit (491)

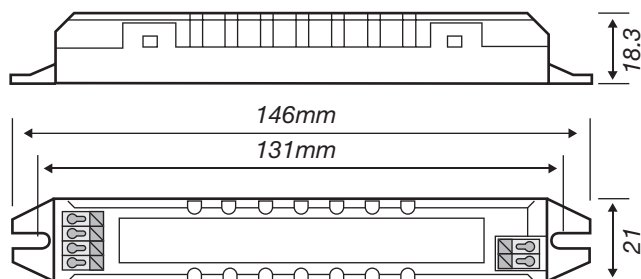

Luminaire mount, weight 35 g

Connections

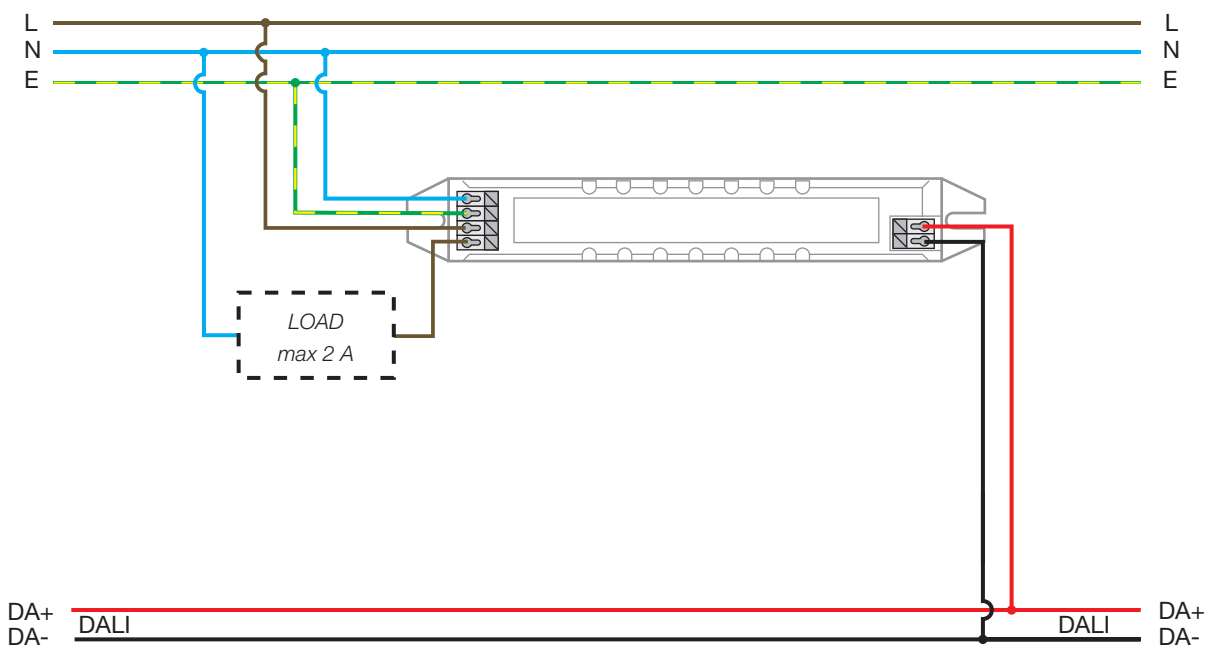

Introduction

Single channel relay unit for, integration in luminaires or electrical cabinets. Designed to allow control of switched loads.

Key Features

- Switches up to 3 Helvar EL-s / TCs ballasts

Technical Data

Supply voltage:	200-265 V, 45-65 Hz
External MCB protection:	2 A
Power consumption:	1.3 W (max)
Relay load:	2 A (resistive), 3 Helvar EL-s / TCs ballasts
Standby Power:	0.7 W
Max Total Losses:	1.3 W
DALI consumption:	2 mA
Ambient temperature:	0...50°C
Relative humidity:	90% max, non-condensing
Storage temperature:	-10°C...+70°C
IP rating:	30

Product Order Code: 491