

80 W Dimmable Freedom LED driver

Product code: 5812

80 W 220 – 240 V 0 / 50 – 60 Hz

- Future-proof Freedom Interface to power Freedom Node, enabling a various wireless lighting control systems support
- Enhanced Hybrid Dimming technology for high quality light output, complying with IEEE 1789 recommendation*
- 1 - 100 % dimming range
- Very high efficiency up to 95 %
- Low current ripple
- Suitable for DC use
- Long lifetime up to 100 000 h
- Driver protection Class I
- Ideal solution for Class I luminaires, suitable for Class II luminaires too*



* See pages 3-5 for details.

Freedom

Functional Description

- Adjustable constant current output: 150 mA (default) to 350 mA
- Current setting with external resistors
- Full load recognition with automatic recovery and adaptive LED overload / open circuit / short circuit protection
- Inbuilt power supply for external Freedom Node / luminaire intelligent unit use
- Helvar Freedom Interface 1.5 support

Mains Characteristics

| | |
|----------------------------------|---------------------------------------|
| Nominal rated voltage range | 220 V – 240 V, 0 / 50 – 60 Hz |
| AC voltage range | 198 VAC – 264 VAC |
| | Withstands max. 320 VAC (max. 1 hour) |
| | Withstands min. 176 VAC (max. 1 hour) |
| DC voltage range | 176 VDC – 280 VDC |
| DC starting voltage | > 190 VDC |
| Mains current at full load | 0.22 – 0.42 A |
| Frequency | 0 / 50 Hz – 60 Hz |
| Stand-by power consumption | < 0.5 W |
| THD at full power | < 10 % |
| Leakage current to earth | < 0.4 mA |
| Tested surge protection | 1 kV L-N, 2 kV L-GND (IEC 61000-4-5) |
| Tested fast transient protection | 2 kV (IEC 61000-4-4) |

Insulation between circuits & driver case


| | |
|---|------------------|
| Mains circuit - Output | Non-isolated |
| Mains circuit - Freedom Node interface | Non-isolated |
| Mains, Interface and output - Driver case | Basic insulation |

Load Output (non-isolated)

| | |
|------------------------------|--|
| Output current (I_{out}) | 150 mA (default) – 350 mA |
| Accuracy | ± 5 % |
| Ripple | < 2 %* at ≤ 120 Hz |
| | *] Low frequency, LED load: Cree MX3 LEDs |
| PstLM | < 0.03* |
| SVM | < 0.03* |
| | *] At full power, measured with Cree XP-G LED modules. |
| U_{out} (max) (abnormal) | 400 V |



| I_{LED} | 150 mA | 350 mA |
|------------------------------------|-------------|------------|
| P_{Rated} | 52.5 W | 80 W |
| U_{LED} | 150 – 350 V | 64 – 228 V |
| PF (λ) at full load | 0,96 | 0,98 |
| Efficiency (η) at full load | 95 % | 94 % |

Operating window

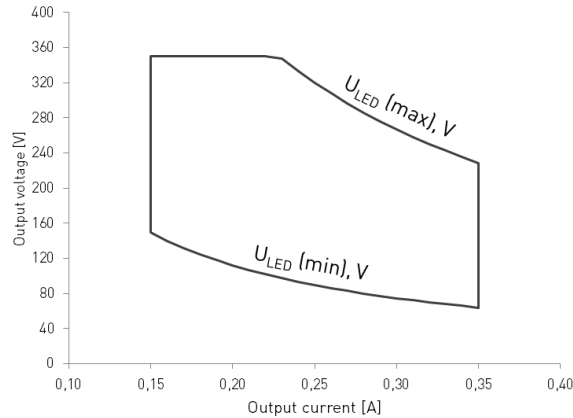

Note: Dimming between 1% - 100% possible across the whole operating window

Driver performance

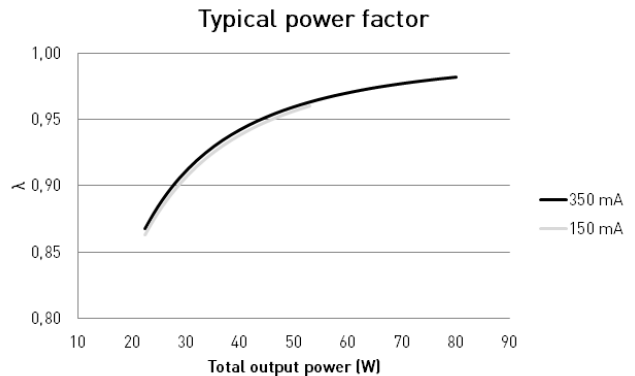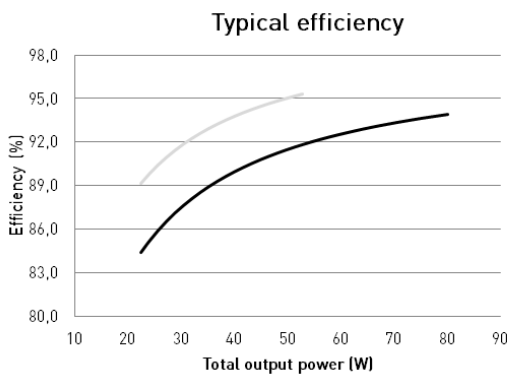

Operating Conditions and Characteristics

| | |
|--|---|
| Absolute highest allowed t_c point temperature | 75 °C |
| T_c life (60 000 h) temperature | 75 °C |
| Ambient temperature range | -25 °C .. +50 °C* |
| Storage temperature range | -40 °C .. +80 °C |
| Maximum relative humidity | No condensation |
| Life time (90 % survival rate) | 100 000 h, at $t_c = 65$ °C 90 000 h, at $t_c = 70$ °C 60 000 h, at $t_c = 75$ °C |


*) For other than independent use, higher t_s of the controlgear possible as long as highest allowed t_c point temperature is not exceeded

Quantity of drivers per miniature circuit breaker 16 A Type C

| Based on inrush current I_{peak} | Typ. peak inrush current I_{peak} | 1/2 value time, Δt | Calculated energy, $I_{peak}^2 \Delta t$ |
|------------------------------------|-------------------------------------|----------------------------|--|
| 31 pcs | 41 A | 187 μ s | 0.24 A ² s |

CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

| MCB type | Relative quantity of LED drivers |
|----------|----------------------------------|
| B 10 A | 37 % |
| B 16 A | 60 % |
| B 20 A | 75 % |
| C 10 A | 62 % |
| C 16 A | 100 % (see table above) |
| C 20 A | 125 % |

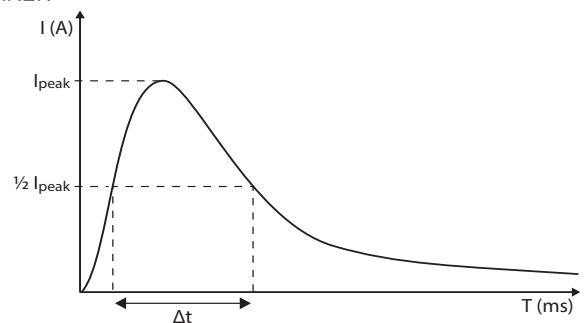


CONTINUOUS CURRENT

Total continuous current of the drivers and installation environment must always be considered and taken into calculations when installing drivers behind miniature circuit breaker. Example calculation of total drivers amount limited by continuous current: $n(I_{cont}) = [16 A (I_{nom, Ta}) / \text{"nominal mains current with full load"}] \times 0.76$. This calculation is an example according to recommended precautions due to multiple adjacent circuit breakers (> 9 MCBs) and installation environment (T_a 30 degrees); variables may vary according to the use case. Both inrush current and continuous current calculations are based on ABB S200 series circuit breakers. More specific information in ABB series S200 circuit breaker documentation.

NOTE! Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Enhanced Hybrid dimming technique

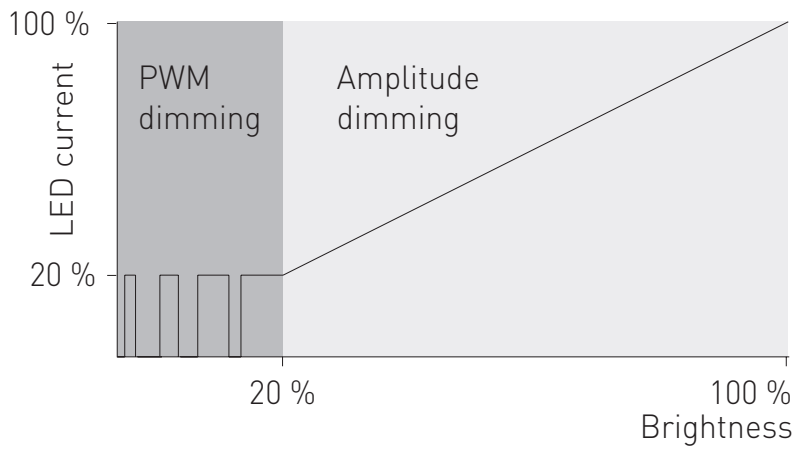


| Dimming range | Dimming technique |
|---------------|-------------------------------|
| 1 % - 20 % | Pulse Width Modulation (PWM)* |
| 20 % - 100 % | Amplitude (DC) |

* PWM dimming frequency 1 - 8 kHz

Helvar hybrid dimming products combine the best features from Amplitude dimming and from Pulse Width Modulation (PWM) dimming. CCR is a very efficient technique for dimming the light output especially on higher range. On lower range, the hybrid dimming products implement high-frequency PWM dimming to ensure high quality dimming from 20 % down to 1 % providing low flicker dimming performance. The dimming technology complies with IEEE 1789-2015 recommendation about current modulation percent and frequency in the dimming range between 3 % - 100 %.

Freedom power output as external “luminaire intelligence unit” supply

Helvar Freedom drivers supports external control unit usage with the Freedom Node - power output. The driver can use the Freedom Node - output terminal to supply power and connect with Freedom Node - intelligent communication units via UART digital communication. The power supply specification and pin order for connector are listed in the details below. For further SW side integration, please contact Helvar.

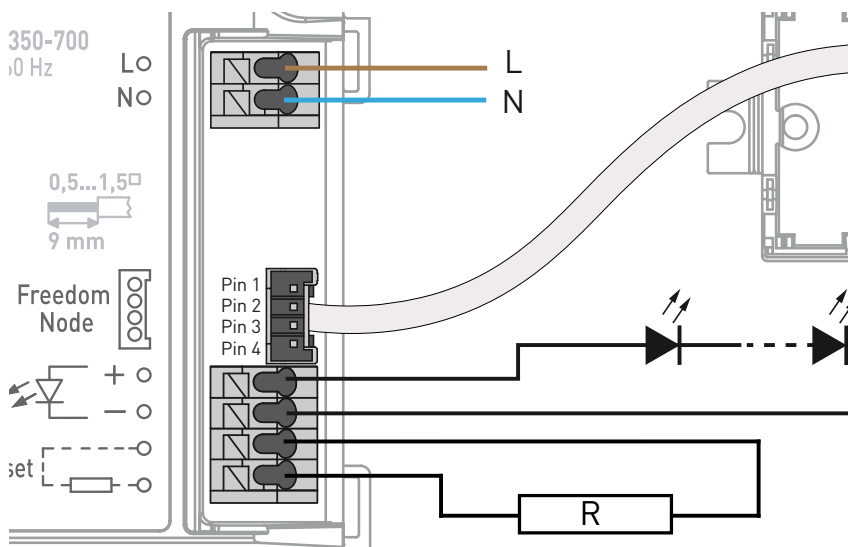

Pin connections

- Pin 1 Rx (Digital signal)*
- Pin 2 Ground
- Pin 3 VDD
- Pin 4 Tx (Digital signal)*

* Rx/Tx From LED driver perspective.

Power supply specification

- Voltage 3.3 V [±0.3V]*
- Continuous current max. 16 mA
- Peak current 30 mA (max. 100 ms each 5 Hz cycle)
- Standby mode current max. 10 mA**
- Connector MOLEX (35363-0460)

* Not continuous voltage supply by default.


** [Networked] standby power < 0,5 W

The UART communication follows Helvar Freedom Interface 1.5 by default. For more details about the communication protocol, please contact Helvar.

Connections and Mechanical Data

| | |
|-----------------------------------|---|
| Wire size | 0.5 mm ² – 1.5 mm ² |
| Wire type | Solid core and fine-stranded |
| Wire insulation | According to EN 60598 |
| Maximum driver to LED wire length | 1.5 m |
| Weight | 220 g |
| IP rating | IP20 |


Connections

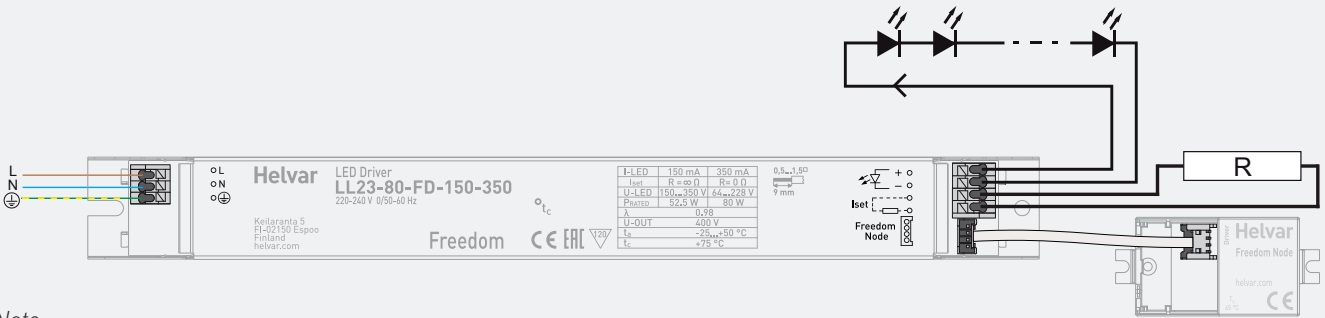

Note:

- Label may differ if the unit is preset to fixed current
- Not suitable for load side switching operation

Dimensions (mm)

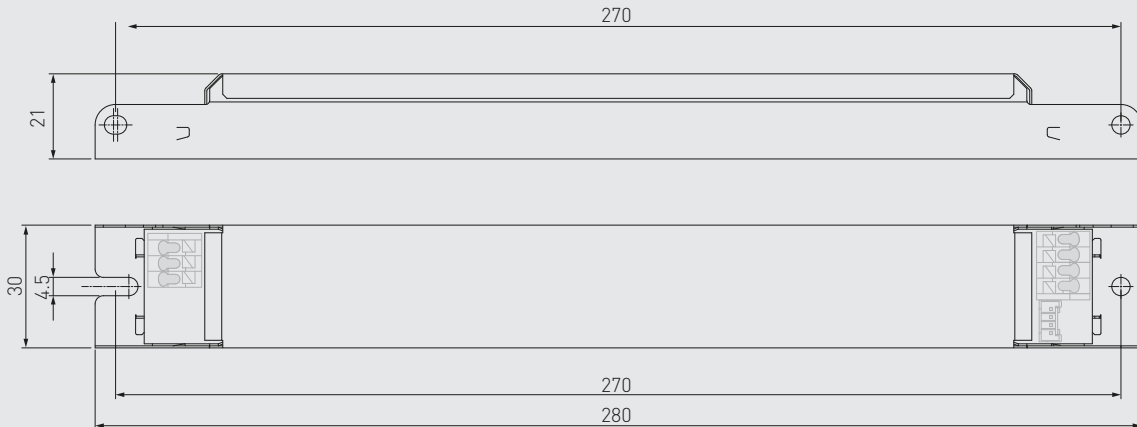

Output current can be set with the current setting resistor connected to the Iset terminal. Example current and resistor values across the range can be found in the following table. More information about the current setting resistor is given on page 5.

Iset current setting resistor values

| R(Ω) | 0 | 220 | 390 | 560 | 680 | 820 | 1k | 1,5k | 1,8k | 2,2k | 2,74k | 3,3k | 3,9k | 4,7k | 5,6k | 8,2k | 12k | 18k | ∞ |
|-----------------------|--------|-----|-----|-----|--------|--------|--------|--------|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----|
| I _{out} (mA) | 350 | 330 | 320 | 310 | 300 | 290 | 280 | 270 | 260 | 250 | 240 | 230 | 220 | 210 | 200 | 190 | 180 | 170 | 150 |
| Order Code | T70000 | N/A | N/A | N/A | T70681 | T70821 | T70102 | T70152 | N/A | T70222 | T72741 | T70332 | T70392 | T70472 | T70562 | T70822 | T70123 | T70183 | N/A |

LL23-80-FD-150-350 LED driver is suited for built-in usage in luminaires. With LL1x2130-SR strain reliefs, independent use is possible too (see the LL1x2130-SR datasheet for details). In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

Installation & operation

Maximum ambient and t_c temperature

- For built-in components inside luminaires, the t_a ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the t_c point temperature does not exceed the t_c maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum t_c point temperature is not exceeded under the conditions of use.

Current setting resistor

LL23-80-FD-150-350 LED driver features a constant current output adjustable via current setting resistor.

- An external resistor can be inserted in to the current setting terminal, allowing the user to adjust the LED driver output current
- When no external resistor is connected, then the LED drivers will operate at their default lowest current level
- A standard through-hole resistor can be used for the current setting. To achieve the most accurate output current it is recommended to select a quality low tolerance resistor. Minimum diameter for resistor leg is 0.51mm.
- Always connect the current setting resistor only into the terminals marked with I_{set} on the LED driver label.
- For the resistor/current value selection, refer to the table on page 4.

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Lamp failure functionality

No load: When open load is detected, driver will go to standby. Automatic recovery is on during the first 10 minutes. If open load is still detected after the first 10 minutes, driver goes to standby mode and recovers through mains reset.

Overload: The driver can withstand overload. When small overvoltage occurs, the driver adaptively lower the output current to adjust the output power. When high overload occurs, the driver goes to standby.

Underload: The driver can withstand underload. When underload occurs, the driver goes to standby.

Short circuit: The driver can withstand output short circuit. When short circuit occurs, the driver goes to standby.

Conformity & standards

| | |
|---|----------------|
| General and safety requirements | EN 61347-1 |
| Particular safety requirements for DC or AC supplied electronic control gear for LED modules | EN 61347-2-13 |
| Thermal protection class | EN 61347, C5e |
| Mains current harmonics | EN 61000-3-2 |
| Limits for voltage fluctuations and flicker | EN 61000-3-3 |
| Radio frequency interference | EN 55015 |
| Immunity standard | EN 61547 |
| Performance requirements | EN 62384 |
| Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers | IEEE 1789-2015 |
| Compliant with relevant EU directives | |
| RoHS / REACH compliant | |
| CE / UKCA marked | |

Label symbols



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 120 °C.

Freedom

A control gear supporting a wireless luminaire control solutions via Freedom Interface.