

322D2, 322BD2 HIGH BAY MULTISENSOR

Automatically control lighting loads at heights that are too high for general sensors.

The High Bay Multisensor is a DALI-2 certified compact unit that provides energy-saving functions in DALI applications where mounting heights are too high for standard sensors, such as warehouses and factories.

Sealed with a gasket that protects it from dust and water, this IP65 sensor is designed to be recessed in a ceiling void or in a luminaire construction.

Since its detection sensitivity is less dependent on movement direction than that of most PIR sensors, fewer units are required to reliably cover a target area.

The unit features:

- A passive infrared detector (PIR), which detects movement within its coverage area, allowing load control in response to changes in space occupancy. It switches the lights on when its coverage area is occupied, and off when it is unoccupied
- A light sensor, which provides a bright-out function: it can be programmed in Designer to switch off the lights when the natural light rises above a predefined illuminance threshold.

The High Bay Multisensor is compatible with Helvar's lighting systems and configuration software, Designer.




1. PIR sensor
2. Status LED
3. Light sensor

Key Features


- Excellent detection performance through high sensitivity and multidirectional coverage.
- Suitable for applications with very high ceilings.
- Protected against dust and water (IP65).
- Programmable bright-out control for energy efficiency (only available on a lighting router system).
- Simple connection and integration into a Helvar DALI control network.
- Programmable in Designer.
- DALI-2 certified input device.

Presence Detection Coverage


7.5 m Height

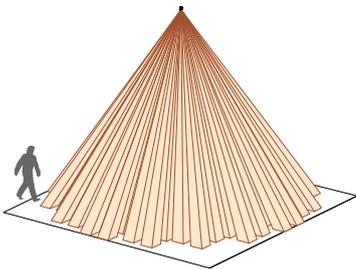


15 m Height

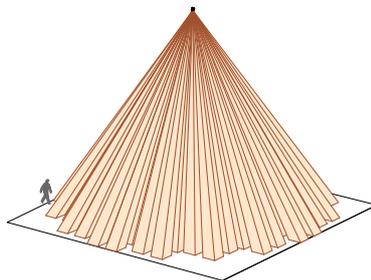


Detection Angle of 70°

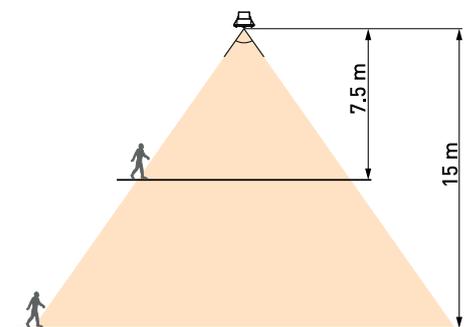


Detection Pattern at Floor Level

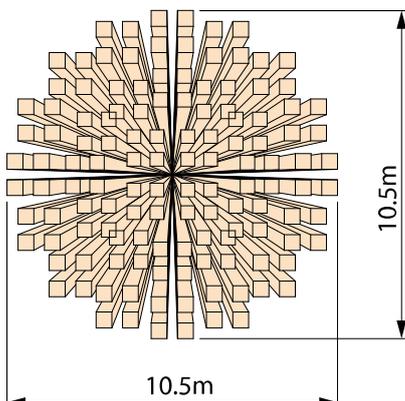


Detection Pattern at Floor Level

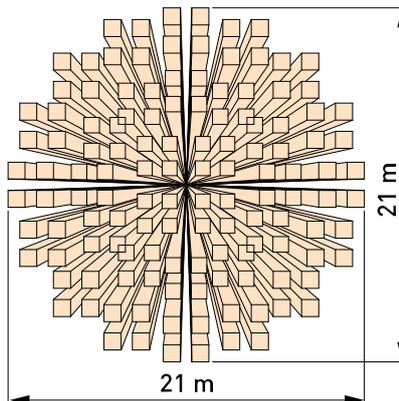

Dimensions (mm)

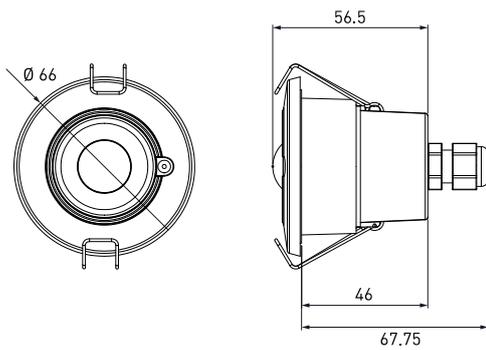

Connections

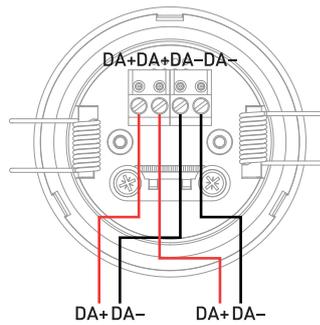

Technical Data

Connections

DALI	Removable connector block
Cable jacket diameter:	4.5 mm – 7 mm
Wire section:	0.5 mm ² – 1.5 mm ² solid or stranded
Cable rating:	All cables must be mains rated.

Electrical data

DALI supply input:	12 V – 22.5 V
DALI consumption:	10 mA Max

Sensors

Light sensor:	For bright-out function
Presence detector:	Passive infrared (PIR)

Operating and storage conditions

Ambient temperature:	0 °C to +50 °C
Relative humidity:	Max. 90 %, noncondensing
Storage temperature:	-10 °C to +70 °C

Compatibility

Router:	950
Designer:	5.8.2 or later

Mechanical data

Max. recommended mounting height:	17 m
Presence detection coverage area:	346 m ² @ 15 m mounting height 87 m ² @ 7 m mounting height
Mounting hole diameter:	51 mm +/- 1 mm



Note: If replacing older sensor then 52 mm to 55 mm mounting hole is acceptable.

Ceiling thickness:	Maximum 25mm
Bezel diameter:	66 mm
Recommended clearance depth:	12 cm (with cable cover, incl. 5 cm for cabling)
Material (casing):	Flame retardant PC+ABS
Finish/Colour:	322D2: Semi-matt / White RAL 9003 321BD2: Semi-matt / Anthracite grey RAL 7016
Weight:	70 g
IP rating:	IP65

Conformity and standards

Conformity:	
DALI:	IEC62386, Parts 101, 103 and 303.
EMC emission:	EN 55015
EMC immunity:	EN 61547
Safety:	EN 61347-2-11
Environment:	Complies with WEEE and RoHS directives.