


28 W SELV constant current LED driver

Product code: 5928xxx (see last page)

28 W 220 – 240 V 50 – 60 Hz

- SELV output protection for safety and flexibility in luminaires
- Low current ripple, complying with IEEE 1789 recommendation
- Extremely compact dimensions for flexible usage
- Ideal solution for Class I and Class II luminaires
- For driving Class III (SELV) luminaires, optional strain relief for independent use outside of luminaire (LC-SR-MINI, LC-SR-MINI-B or LC-SR-MINI-LOOP)*

*See also last page.



Functional Description

- Adjustable constant current output: 500 mA to 700 mA (default)
- Current setting via dip-switches
- Overload, open & short circuit protection

Mains Characteristics

| | |
|----------------------------------|--|
| Nominal rated voltage range | 220 V – 240 V, 50 – 60 Hz |
| AC voltage range | 176 VAC – 264 VAC |
| DC voltage range | 176 VDC - 280 VDC |
| Mains current at full load | 0.22 A |
| Frequency | 50 Hz – 60 Hz |
| Stand-by power consumption | < 0.5 W |
| THD at full power | < 10 % |
| Tested surge protection | 1 kV L-N (IEC 61000-4-5) 2 kV L/N-GND (IEC 61000-4-5) |
| Tested fast transient protection | 1 kV (IEC 61000-4-4) |

Insulation between circuits & driver case

| | |
|--------------------------------|------------------------------|
| Mains circuit - SELV circuit | Double/reinforced insulation |
| Mains and output - Driver case | Double/reinforced insulation |


Load Output (SELV <60 V)

| | |
|------------------------------|--------------------------------------|
| Output current (I_{out}) | 500 mA – 700 mA (default) |
| Accuracy | $\pm 5 \%$ |
| Ripple | < 2 % ¹⁾ at ≤ 120 Hz |
| PstLM | < 0.04 ²⁾ |
| SVM | < 0.02 ²⁾ |
| U_{out} (max) (abnormal) | 50 V |

1) Low frequency
2) At full power, measured with Cree XP-G LED modules.

| I_{LED} | 500 mA | 700 mA |
|------------------------------------|---------|---------|
| P_{Rated} | 20 W | 28 W |
| U_{LED} | 28-40 V | 28-40 V |
| PF (λ) at full load | 0.95 | 0.95 |
| Efficiency (η) at full load | 88 % | 88 % |


Operating window

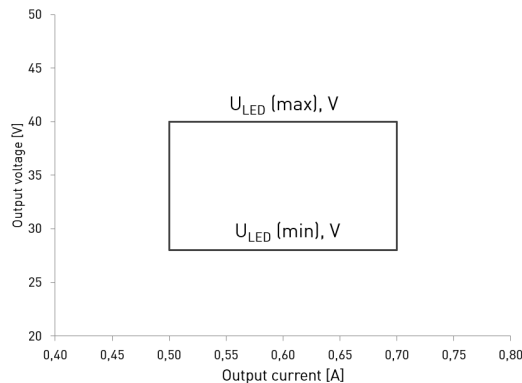


Current value is adjustable in steps via dip-switch. See dip-switch settings in page 3 for details.

Driver performance

Typical efficiency

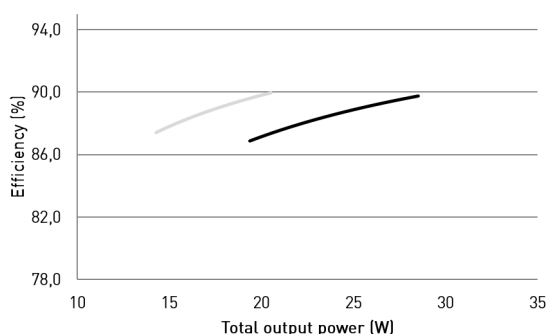

Typical power factor

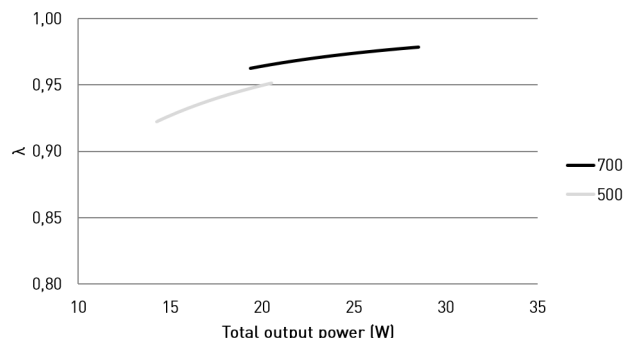

Operating Conditions and Characteristics

| | |
|--|--|
| Absolute highest allowed t_c point temperature | 70 °C |
| T_c life (50 000 h) temperature | 65 °C |
| Ambient temperature range* | -20 °C .. +40 °C* |
| Storage temperature range | -40 °C .. +80 °C |
| Maximum relative humidity | No condensation |
| Life time (90 % survival rate) | 50 000 h, at $t_c = 65$ °C 30 000 h, at $t_c = 70$ °C |


*) For other than independent use, higher t_a of the controlgear possible as long as highest allowed t_c point temperature is not exceeded

Quantity of drivers per miniature circuit breaker 16 A Type C

| Based on inrush current I_{peak} | Typ. peak inrush current I_{peak} | 1/2 value time, Δt |
|------------------------------------|-------------------------------------|----------------------------|
| 37 pcs | 30 A | 200 μs |

CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

| MCB type | Relative quantity of LED drivers |
|----------|----------------------------------|
| B 10 A | 37 % |
| B 16 A | 60 % |
| B 20 A | 75 % |
| C 10 A | 62 % |
| C 16 A | 100 % (see table above) |
| C 20 A | 125 % |

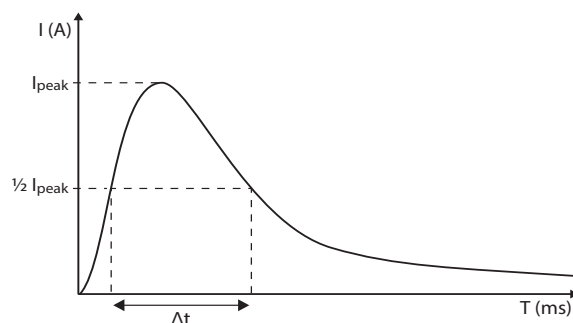

CONTINUOUS CURRENT


Total continuous current of the drivers and installation environment must always be considered and taken into calculations when installing drivers behind miniature circuit breaker. Example calculation of total drivers amount limited by continuous current: $n(I_{cont}) = [16 A (I_{nom,Ta}) / \text{"nominal mains current with full load"}] \times 0.76$. This calculation is an example according to recommended precautions due to multiple adjacent circuit breakers (> 9 MCBs) and installation environment (T_a 30 degrees); variables may vary according to the use case. Both inrush current and continuous current calculations are based on ABB S200 series circuit breakers. More specific information in ABB series S200 circuit breaker documentation.

NOTE! Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Connections and Mechanical Data

| | |
|-----------------------------------|---|
| Wire size | 0.5 mm ² – 1.5 mm ² |
| Wire type | Solid core and fine-stranded |
| Wire insulation | According to EN 60598 |
| Maximum driver to LED wire length | 1.5 m |
| Weight | 80 g |
| IP rating | IP20 |


Connections

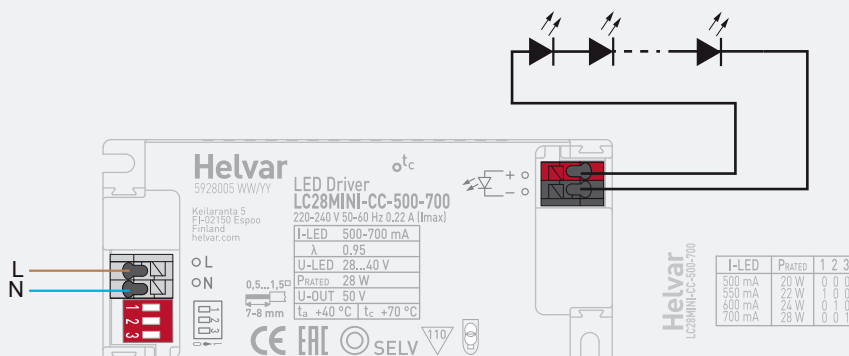

Note:

- Not suitable for load side switching operation

Dimensions (mm)

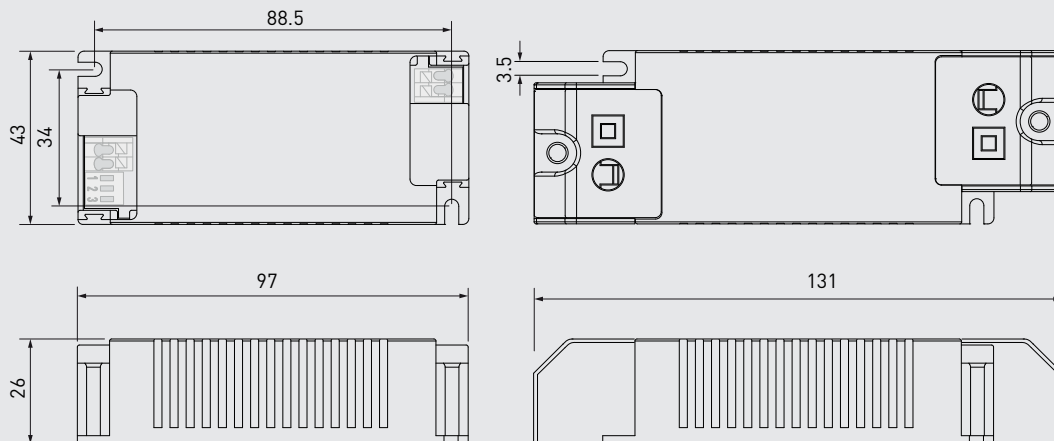

In LC28MINI-CC-500-700, the current can be set with dip-switches. With each combination of switch setup, a different output current value can be set. The maximum value can be reached with the dip-switch setting presented below and minimum with all switches set to "0" (pushed away from the label, see connections picture above). The output current values according to the dip-switch settings are presented below.

Dip-switch combinations, output currents and voltage ranges (Nominal I_{out} (±5 % tol.))

| Dip-Switch combination | 000 | 100 | 010 | 001 |
|------------------------|-----------|-----------|-----------|-----------|
| I _{out} (mA) | 500 | 550 | 600 | 700 |
| Voltage range | 28 - 40 V | 28 - 40 V | 28 - 40 V | 28 - 40 V |

LC28MINI-CC-500-700 LED driver is suited for built-in usage in luminaires. With external strain relief (LC-SR-MINI, LC-SR-MINI-B or LC-SR-MINI-LOOP), independent use is possible too. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

Installation & operation

Maximum ambient and t_c temperature:

- For built-in components inside luminaires, the t_a ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the t_c point temperature does not exceed the t_c maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum t_c point temperature is not exceeded under the conditions of use.

Current setting via dip-switch

LC28MINI-CC-500-700 LED driver features a constant current output adjustable via dip-switch combinations

- For the combination/current values, refer to the table on page 3.
- Only the dip-switch settings presented in the table must be used.

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

Installation site

- The general preferred installation position of LED drivers for independent use is to have the top cover facing upwards.

Lamp failure functionality

No load

When open load is detected, driver limits output voltage according to $U_{out} (max)$ (abnormal).

Overload

The driver can withstand overload.

Short circuit

Driver can withstand output short circuit and after resolving the fault, driver recovers normal operation automatically.

Conformity & standards

| | |
|---|-----------------|
| General and safety requirements | EN 61347-1 |
| Particular safety requirements for DC or AC supplied electronic control gear for LED modules | EN 61347-2-13 |
| Mains current harmonics | EN 61000-3-2 |
| Limits for voltage fluctuations and flicker | EN 61000-3-3 |
| Radio frequency interference | EN 55015 |
| Immunity standard | EN 61547 |
| Performance requirements | EN 62384 |
| Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers | IEEE1798 - 2015 |
| Compliant with relevant EU directives | |
| RoHS / REACH compliant | |
| CE / UKCA marked | |

Label symbols



Safety isolating control gear with short circuit protection (SELV control gear).



Double insulated control gear suitable for built-in use.



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 110 °C.

LC28MINI-CC-500-700 LED driver can be ordered as just the built-in LED driver itself or then as a combination package with strain reliefs for input and output side. Input strain relief is a LOOPing model with the connector block inside, output strain relief is screwless easy-to-use model. Everything is preassembled from the factory, ready to be connected to your LED luminaire! Please refer to the order codes in the table below.

ORDER CODES

| | Order code | Product name | What is included |
|----------------------------|------------|--------------------------|---|
| <i>LC28MINI-CC-500-700</i> | | | |
| Product order codes | 5928 | LC28MINI-CC-500-700 | LC28MINI-CC-500-700 LED driver |
| | 5928025 | LC28MINI-CC-500-700-LOOP | LC28MINI-CC-500-700 LED driver and LC-SR-MINI-LOOP + LC-SR-MINI-B screwless strain reliefs (input + output), preassembled |

