


150 W **Constant Current** LED driver

Product code: 5824

150 W 220 – 240 V 50 – 60 Hz

- Very high efficiency up to 96%
- Very low current ripple, complying with IEEE 1789 recommendation
- Long lifetime up to 100 000 h
- Suitable for use in emergency lighting applications
- Wide operating voltage range
- Driver protection Class I
- Ideal solution for Class I luminaires, suitable for Class II luminaires too\*

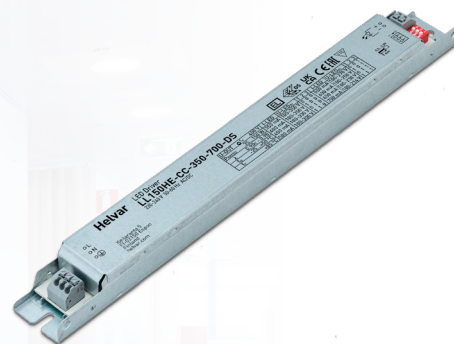

\* See page 4 for details.

**Functional Description**

- Selectable constant current output via DIP switch: 350 mA to 700 mA
- Current selectable in 50 mA current steps
- Wide operating window supporting output power from 35 W up to 150 W
- Excellent flicker-free performance, very low PstLM / SVM values
- Open & short circuit protection

**Mains Characteristics**

Nominal rated voltage range	220 V – 240 V, 50 – 60 Hz
Rated emergency voltage range*	196 V – 254 V, 0 Hz
AC voltage range	198 VAC – 264 VAC
	Withstands max. 320 VAC (max. 1 hour)
	Withstands min. 176 VAC (max. 1 hour)
DC voltage range*	176 VDC – 280 VDC
DC starting voltage	> 190 VDC
Mains current at full load	0.19 – 0.70 A
Frequency	0 / 50 Hz – 60 Hz
THD at full power	< 7 %
Leakage current to earth	< 0.3 mA
Tested surge protection	1 kV L-N, 2 kV L-GND (IEC 61000-4-5)
Tested fast transient protection	2 kV (IEC 61000-4-4)

\*For emergency use, see details in page 4

**Insulation between circuits & driver case**


Mains circuit - Output	Non-isolated
Mains and output - Driver case	Basic insulation

**Load Output (non-isolated)**

Output current ( $I_{out}$ )	350 mA (default) - 700 mA
Accuracy	$\pm 5 \%$
Ripple	< 2 % <sup>1)</sup> at $\leq 120$ Hz
	1) Low frequency, LED load: Cree XP-G LEDs
PstLM	$\leq 0.04$ <sup>2)</sup>
SVM	$\leq 0.02$ <sup>2)</sup>
	2) At full power, LED load: Cree XP-G LEDs
$U_{OUT}$ (max) (abnormal)	400 V
EOFI (EL use)	> 0.98 x output current with AC supply


$I_{LED}$	350 mA	700 mA
$P_{RATED}$	35 W...122.5 W	70 W...150 W
$U_{LED}$	100 – 350 V	100 – 214 V
PF ( $\lambda$ ) at full load	0.98	0.98
Efficiency ( $\eta$ ) at full load	96 %	95 %

## Operating window &amp; driver performance

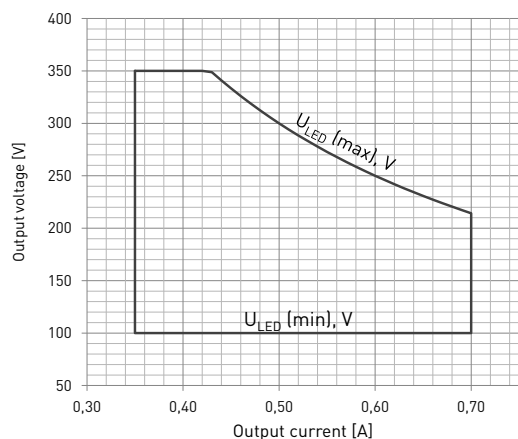


Note: Current value is adjustable in 50 mA steps via dip-switch. See dip-switch settings in page 3 for details.


Current THD

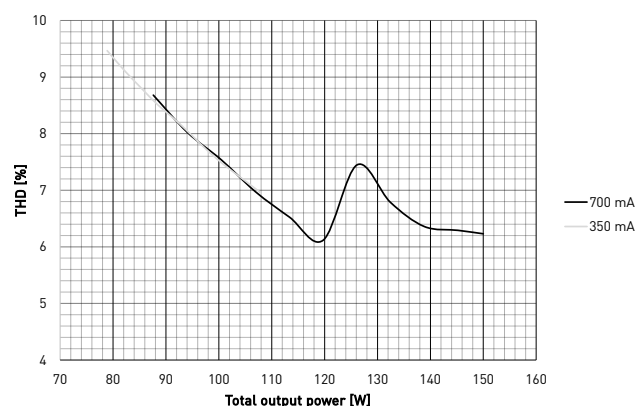

Typical efficiency

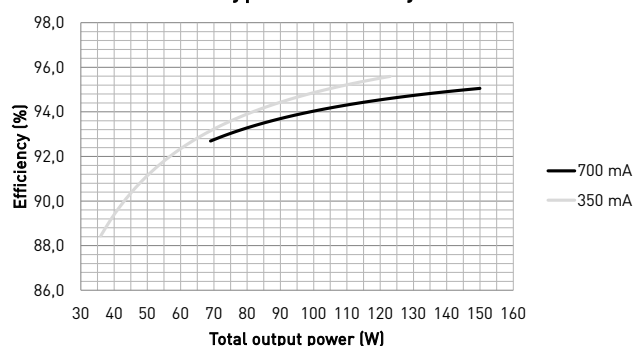

Typical power factor

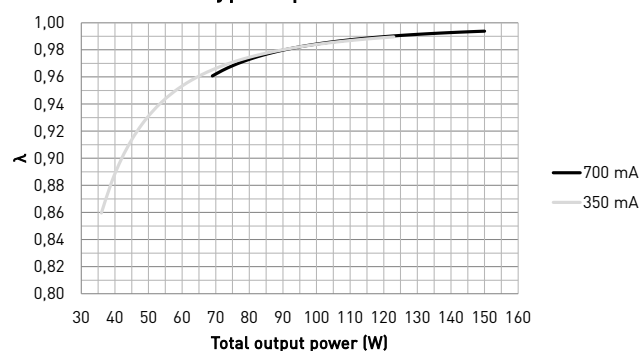

## Operating Conditions and Characteristics

Highest allowed $t_c$ point temperature	85 °C
$t_c$ life (50 000 h) temperature	75 °C
Ambient temperature range*	-25 °C ... +50 °C
Storage temperature range	-40 °C ... +80 °C
Maximum relative humidity	No condensation
Mains switching cycles	No limit
Lifetime (90 % survival rate)	100 000 h, at $t_c = 65$ °C
	50 000 h, at $t_c = 75$ °C
	25 000 h at $t_c = 85$ °C


\*) For other than independent use, higher  $t_a$  of the control gear possible as long as highest allowed  $t_c$  point temperature is not exceeded

## Quantity of drivers per miniature circuit breaker 16 A Type C

Based on $I_{cont}$	Based on inrush current $I_{peak}$	Typ. peak inrush current $I_{peak}$	1/2 value time, $\Delta t$	Calculated energy, $I_{peak}^2 \Delta t$
17 pcs.	15 pcs.	51 A	286 $\mu s$	0.4428 A <sup>2</sup> s

## CONVERSION TABLE FOR OTHER TYPES OF MINIATURE CIRCUIT BREAKER

MCB type	Relative quantity of LED drivers
B 10 A	37 %
B 16 A	60 %
B 20 A	75 %
C 10 A	62 %
C 16 A	100 % (see table above)
C 20 A	125 %

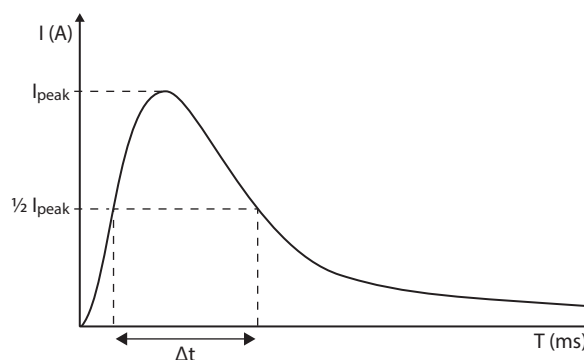


Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

## Connections and Mechanical Data

Wire size	0.5 mm <sup>2</sup> – 1.5 mm <sup>2</sup>
Wire type	Solid core and fine-stranded
Wire insulation	According to EN 60598
Maximum driver to LED wire length	1.5 m
Weight	254 g
IP rating	IP20


## Connections

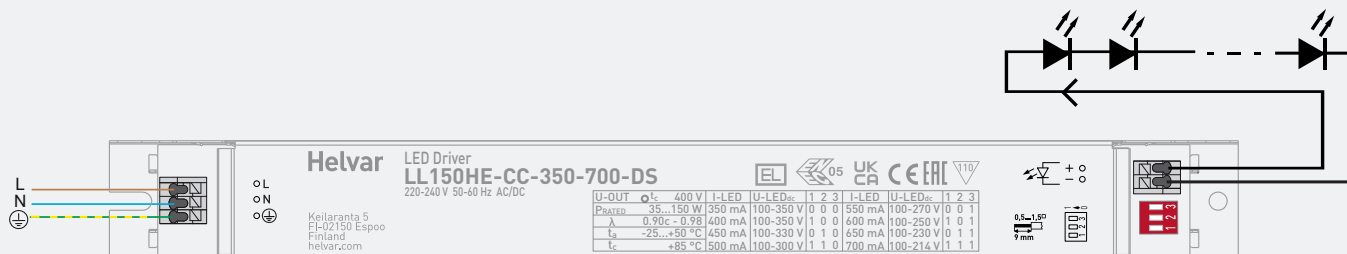

## Note:

- Not suitable for load side switching operation
- Label may differ if the unit is preset to fixed current

## Dimensions (mm)

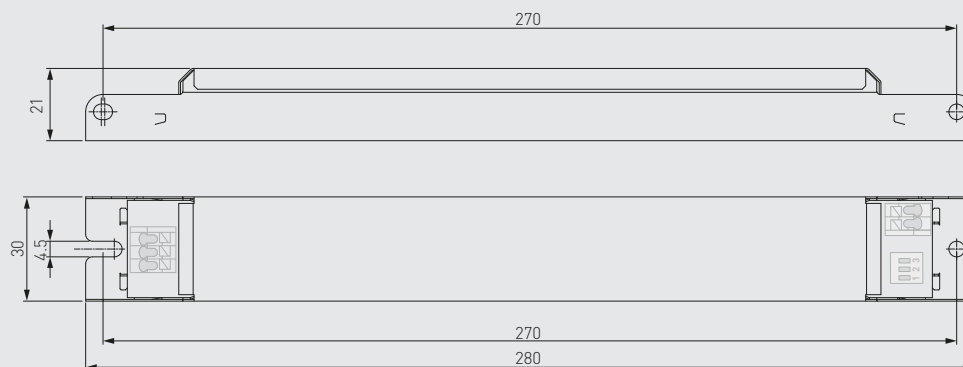

In LL150HE-CC-350-700-DS the current can be set with DIP switches. With each combination of switch setup, a different output current value can be set. The maximum value can be reached with the DIP switch setting "111" (DIP switches pushed towards label, see connections picture above) and minimum with all switches set to "0". The output current values according to the DIP switch settings are presented below.

DIP switch combinations, output currents and voltage ranges (Nominal  $I_{out}$  ( $\pm 5\%$  tol.))

DIP switch combination	000	100	010	110	001	101	011	111
$I_{out}$ (mA)	350	400	450	500	550	600	650	700
Voltage range	100 – 350 V	100 – 350 V	100 – 330 V	100 – 300 V	100 – 270 V	100 – 250 V	100 – 230 V	100 – 214 V

LL150HE-CC-350-700-DS LED driver is suited for built-in usage in luminaires. With LL1x2130-SR strain reliefs, independent use is possible too (see the LL1x2130-SR datasheet for details). In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications. as per the product datasheet.

## Installation & operation

### Maximum ambient and $t_c$ temperature:

- For built-in components inside luminaires, the  $t_a$  ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the  $t_c$  point temperature does not exceed the  $t_c$  maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum  $t_c$  point temperature is not exceeded under the conditions of use.

### Current setting

LL150HE-CC-350-700-DS LED driver features a constant current output settable with the DIP switch. See page 3 for more information.

### Emergency use

- The product can be continuously operated only with AC, the DC is reserved only for emergency usage.

### LED driver earthing

- LL150HE-CC-350-700-DS LED driver is a protective Class I device and designed for Class I luminaires.
- If used inside **Class I** luminaires, this LED driver must always have the protective earth cable connected for safety reasons.
- The driver is designed to be used inside Class I luminaires. For usage inside **Class II** luminaires, the safety of the luminaire shall be ensured through double/reinforced insulation of live parts and through supplementary insulation of conductive parts of the casing, or any conductive parts connected to the casing, as the casing is only basic insulated from the live parts. The earth connector of the driver shall be left unconnected and there shall be no protective earth terminals in the luminaire terminal block to fulfill the requirements of IEC/EN 60598-1 for Class II luminaires. The EMC performance of the driver change when left unearthed, so it is always the responsibility of the integrator to take measures and necessary actions, for example by luminaire design to ensure the assembled luminaire complies with latest EMC standard.

### Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

## Lamp failure functionality

### No load

When open load is detected, driver limits output voltage according to  $U_{out}$  (max) (abnormal).

### Overload

Driver can withstand overload, however reliable operation is only guaranteed in specified voltage range.

### Underload

Reliable operation of the driver is only guaranteed in specified voltage range.

### Short circuit

Driver can withstand output short circuit.

## Conformity & standards

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Additional safety requirements for AC or DC supplied electronic controlgear for emergency lighting	EN 61347-2-13, Annex J
Thermal protection class	EN 61347, C5e
Mains current harmonics	EN IEC 61000-3-2
Limits for voltage fluctuations and flicker	EN 61000-3-3
Radio frequency interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN IEC 62384
Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers	IEEE 1789-2015
Compliant with relevant EU directives	
RoHS / REACH compliant	
ENEC and CE / UKCA marked	

## Label symbols



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 120 °C.



AC/DC supplied electronic control gear for emergency lighting purposes intended for connection to a centralized emergency power supply.