

## 80 W **Constant Current** LED driver

Product code: 5933

**80 W 220 – 240 V 0 / 50 – 60 Hz**

- Highly energy- and cost-efficient design
- High efficiency up to 94 %
- Low current ripple, complying with IEEE 1789 recommendation
- Long lifetime up to 50 000 h
- Selectable current output through dip-switch.
- Suitable for emergency lighting applications
- Driver protection Class I
- Ideal solution for Class I luminaires, suitable for Class II luminaires too\*



\* See page 4 for details.



### Functional Description

- Adjustable constant current output: 200 / 250 / 300 / 350 mA (default)
- Current setting adjustable via dip-switch
- Fault load situation protection (open circuit, short-circuit, overload) see page 4 for details
- 280 mm length casing for good thermal performance
- Low inrush current

### Mains Characteristics

Nominal rated voltage range	220 V – 240 V, 50 – 60 Hz
AC voltage range	198 VAC – 264 VAC
	Withstands max. 300 VAC (max. 1 hour)
	Withstands min. 176 VAC (max. 1 hour)
DC voltage range	176 VDC – 280 VDC
DC starting voltage	> 186 VDC
Mains current at full load	0.35 – 0.40 A
Frequency	50 Hz – 60 Hz
THD at full power	< 10 %
Leakage current to earth	< 0.7 mA
Tested surge protection	1 kV L-N, 2 kV L-GND (IEC 61000-4-5)
Tested fast transient protection	2 kV (IEC 61000-4-4)

### Insulation between circuits & driver case


Mains circuit - Output	Non-isolated
Mains and output - Driver case	Basic insulation

### Load Output (non-isolated)

Output current ( $I_{out}$ )	200 / 250 / 300 / 350 mA (default)
Accuracy	$\pm 7.5 \%$
Ripple	< 5 %* at $\leq 120$ Hz
	*] Low frequency, LED load: Cree MX3 LEDs
PstLM	< 0.06*
SVM	< 0.02*
	*] At full power, measured with Cree XP-G LED modules.
$U_{OUT}$ (max) (abnormal)	400 V


$I_{LED}$	200 mA	250 mA	300 mA	350 mA
$P_{Rated}$	46 W	57.5 W	69 W	80.5 W
$U_{LED}$	140 – 230 V	140 – 230 V	140 – 230 V	140 – 230 V
PF ( $\lambda$ ) at full load	0.92	0.95	0.95	0.95
Efficiency ( $\eta$ ) at full load	94 %	94 %	94 %	94 %

## Operating window

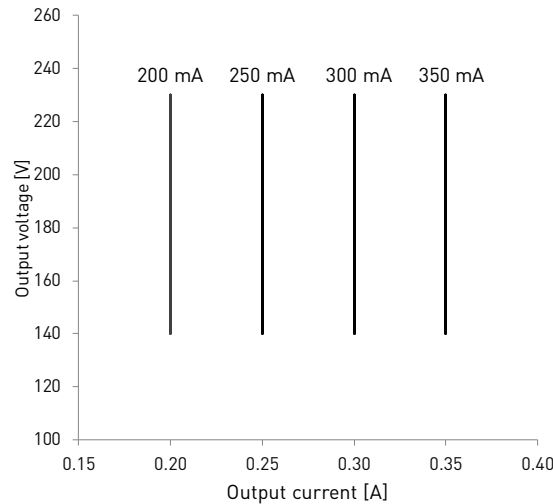


## Driver performance

Typical efficiency

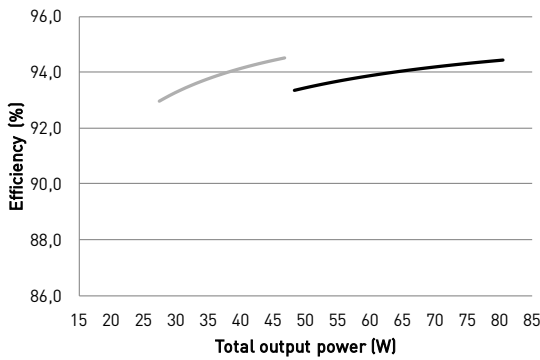

Typical power factor

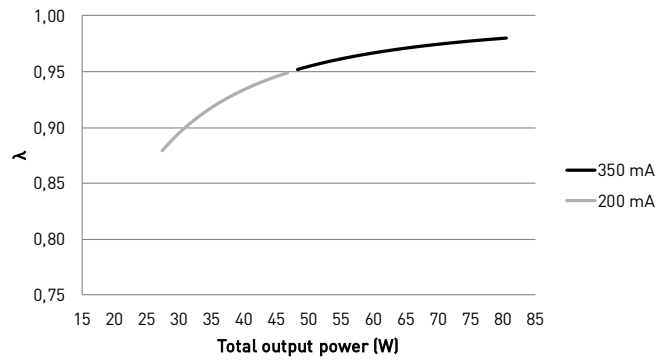

## Operating Conditions and Characteristics

Highest allowed $t_c$ point temperature	80 °C
$t_c$ life (50 000 h) temperature	75 °C
Ambient temperature range*	-25 °C ... +50 °C
Storage temperature range	-40 °C ... +80 °C
Maximum relative humidity	No condensation
Lifetime (90 % survival rate)	50 000 h, at $t_c = 75$ °C 30 000 h, at $t_c = 80$ °C


*\*) For other than independent use, higher  $t_c$  of the control gear possible as long as highest allowed  $t_c$  point temperature is not exceeded*

## Quantity of drivers per miniature circuit breaker 16 A Type C

Based on inrush current $I_{peak}$	Typ. peak inrush current $I_{peak}$	1/2 value time, $\Delta t$	Calculated energy, $I_{peak}^2 \Delta t$
598 pcs*	15 A	40 $\mu$ s	0.0031 A <sup>2</sup> s

*\*the inrush current is not the limiting factor for the products per MCB, please notice the continuous current limitations.*

MCB type	Relative quantity of LED drivers
B 10 A	37 %
B 16 A	60 %
B 20 A	75 %
C 10 A	62 %
C 16 A	100 % [see table above]
C 20 A	125 %

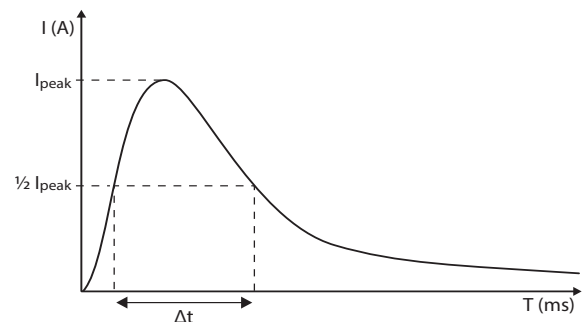


Total continuous current of the drivers and installation environment must always be considered and taken into calculations when installing drivers behind miniature circuit breaker. Example calculation of total drivers amount limited by continuous current:  $n(I_{cont}) = [16 \text{ A } (I_{nom,Ta}) / \text{"nominal mains current with full load"}] \times 0.76$ . This calculation is an example according to recommended precautions due to multiple adjacent circuit breakers (> 9 MCBs) and installation environment ( $T_a$  30 degrees); variables may vary according to the use case. Both inrush current and continuous current calculations are based on ABB S200 series circuit breakers. More specific information in ABB series S200 circuit breaker documentation.

NOTE! Type C MCB's are strongly recommended to use with LED lighting. Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

## Connections and Mechanical Data

Wire size	0.5 mm <sup>2</sup> – 1.5 mm <sup>2</sup>
Wire type	Solid core and fine-stranded
Wire insulation	According to EN 60598
Maximum driver to LED wire length	1.5 m
Weight	204 g
IP rating	IP20


## Connections

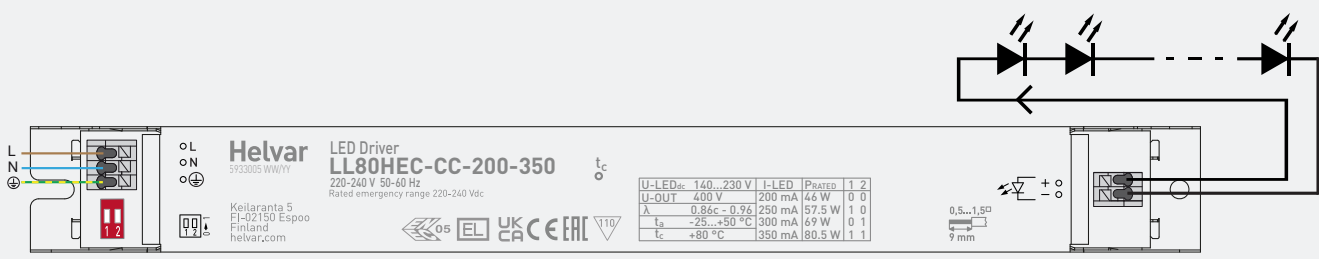

Note:

- Not suitable for load side switching operation

## Dimensions (mm)

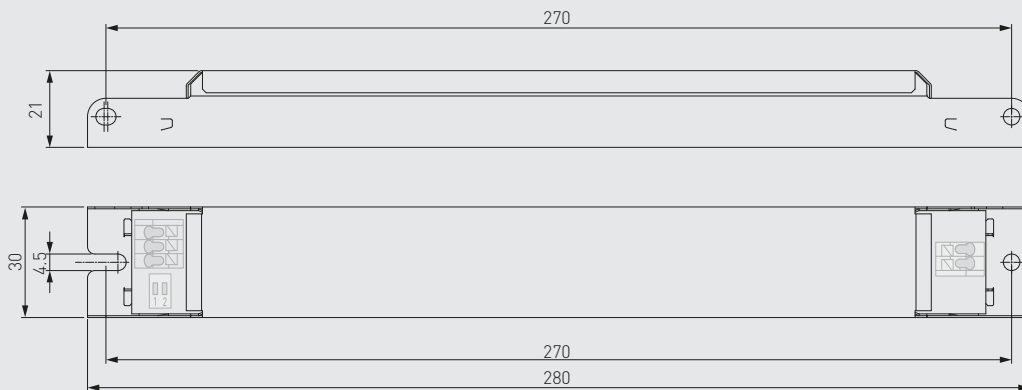

In LL80HEC-CC-200-350, the current can be set with dip-switches. With each combination of switch setup, a different output current value can be set. The maximum value can be reached with the dip-switch setting “11” (dip-switches pushed towards input connector) and minimum with setting “00” (pushed away from the input connector, see connections picture above). The output current values according to the dip-switch settings are presented below.

## Dip-switch combinations, output currents and voltage ranges (Nominal I<sub>out</sub> (±7.5 % tol.))

Dip-Switch combination	00	10	01	11
I <sub>out</sub> (mA)	200	250	300	350
Voltage range	140 – 230 V	140 – 230 V	140 – 230 V	140 – 230 V

LL80HEC-CC-200-350 LED driver is suited for built-in usage in luminaires. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Operating conditions of the LED drivers may never exceed the specifications as per the product datasheet.

## Installation & operation

### Maximum ambient and $t_c$ temperature:

- For built-in components inside luminaires, the  $t_a$  ambient temperature range is a guideline given for the optimum operating environment. However, integrator must always ensure proper thermal management (i.e. mounting base of the driver, air flow etc.) so that the  $t_c$  point temperature does not exceed the  $t_c$  maximum limit in any circumstance.
- Reliable operation and lifetime is only guaranteed if the maximum  $t_c$  point temperature is not exceeded under the conditions of use.

### Current setting

LL80HEC-CC-200-350 LED driver features a constant current output settable through the dip-switches. See page 3 for more information.

### LED driver earthing

- LL80HEC-CC-200-350 LED driver is a protective Class I device and designed for Class I luminaires.
- If used inside **Class I** luminaires, this LED driver must always have the protective earth cable connected for safety reasons.
- The driver is designed to be used inside Class I luminaires. For usage inside **Class II** luminaires, the safety of the luminaire shall be ensured through double/reinforced insulation of live parts and through supplementary insulation of conductive parts of the casing, or any conductive parts connected to the casing, as the casing is only basic insulated from the live parts. The earth connector of the driver shall be left unconnected and there shall be no protective earth terminals in the luminaire terminal block to fulfill the requirements of IEC/EN 60598-1 for Class II luminaires. The EMC performance of the driver change when left unearthed, so it is always the responsibility of the integrator to take measures and necessary actions, for example by luminaire design to ensure the assembled luminaire complies with latest EMC standard.

### Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.
- Please see more details in "MCB information" document in each driver product page in "downloads & links" section.

## Lamp failure functionality

### No load

When open load is detected, driver limits output voltage according to  $U_{out} (max)$  (abnormal).

### Overload

Driver can withstand overload, however reliable operation of the driver is only guaranteed in specified operational voltage range. The LED load will start to blink when overload occurs.

### Short circuit

Driver can withstand output short circuit and after resolving the fault, driver recovers normal operation automatically.

## Conformity & standards

General and safety requirements	EN 61347-1
Particular safety requirements for DC or AC supplied electronic control gear for LED modules	EN 61347-2-13
Additional safety requirements for AC or DC supplied electronic controlgear for emergency lighting	EN 61347-2-13, Annex J
Thermal protection class	EN 61347, C5e
Mains current harmonics	EN 61000-3-2
Limits for voltage fluctuations and flicker	EN 61000-3-3
Radio frequency interference	EN 55015
Immunity standard	EN 61547
Performance requirements	EN 62384
Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers	IEEE 1789-2015
Compliant with relevant EU directives	
RoHS/REACH compliant	
CE / UKCA and ENEC marked	

## Label symbols



Thermally controlled control gear, incorporating means of protection against overheating to prevent the case temperature under any conditions of use from exceeding 110 °C.



AC/DC supplied electronic control gear for emergency lighting purposes intended for connection to a centralized emergency power supply.