

LL1x20-E-CC-500

Helvar

1x20 W Constant Current LED driver

freedom in lighting


- Fixed constant current output: 500 mA
- Maximum 20 W load
- Open and short circuit protection
- Overvoltage protection
- Over temperature protection
- Suitable for Class I, II and III luminaires
- Linear enclosure with strain relief for independent use

Product code: 5889

20 W 220 - 240 V, 50 - 60 Hz



Connections

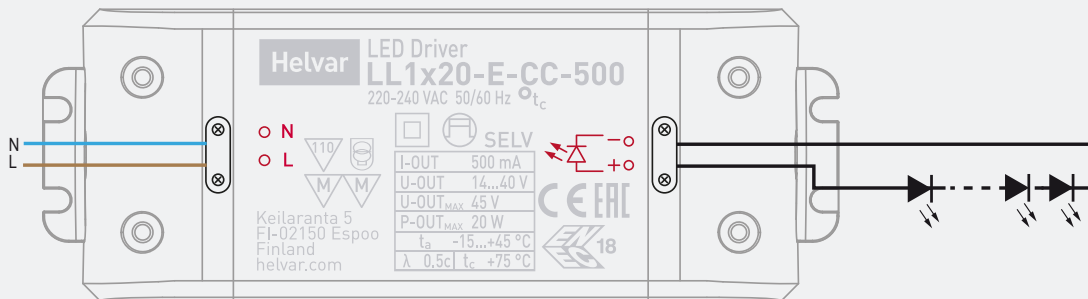

Note: Not suitable for load side switching operation.

Mains Characteristics

| | |
|--------------------------------|---------------|
| Voltage range | 198 - 264 VAC |
| Max mains current at full load | 0.15 - 0.20 A |
| Frequency | 50 - 60 Hz |
| U-OUTmax (abnormal) | 45 V |

Load Output (SELV < 60 V)

| | |
|-----------------------------------|--------|
| Output current | 500 mA |
| Max output power | 20 W |
| Efficiency, at full load, typical | ≥ 0.88 |

Ripple < 10 % at ≤ 120 Hz

| | |
|-------|---------|
| PstLM | < 0.1* |
| SVM | < 0.02* |

*] At full power, measured with Cree XP-G LED modules.

| | |
|-----------------------------|-----------|
| I_{OUT} | 500 mA |
| $P_{OUT(MAX)}$ | 20 W |
| U_{OUT} | 14 - 40 V |
| PF (λ) at full load | 0.50c |
| Efficiency (η) at full load | 0.88 |

Operating Conditions and Characteristics

| | |
|------------------------------|---|
| Max. temperature at Tc point | 75 °C |
| Ambient temperature range | -15...+45 °C |
| Storage temperature range | -40...+80 °C |
| Maximum relative humidity | no condensation |
| Life time | 30 000 h, at Tc max (90 % survival rate) |


Connections and Mechanical Data

| | |
|-----------------------------------|------------------------------|
| Wire size | 0.5 - 1.5 mm ² |
| Wire type | solid core and fine-stranded |
| Maximum driver to LED wire length | 5 m |
| Weight | 70 g |
| IP rating | IP20 |

Conformity & Standards

| | |
|---|---------------|
| General safety requirements | EN 61347-1 |
| Particular safety requirements for DC or AC supplied electronic control gear for LED modules, acc. to | EN 61347-2-13 |
| Performance requirements, acc. to | EN 62384 |
| Mains current harmonics, acc. to | EN 61000-3-2 |
| Limits for Voltage Fluctuations and Flicker, acc. to | EN 61000-3-3 |
| Radio Frequency Interference, acc. to | EN 55015 |
| Immunity standard, acc. to | EN 61547 |

ENEC, CE, UKCA & SELV marked

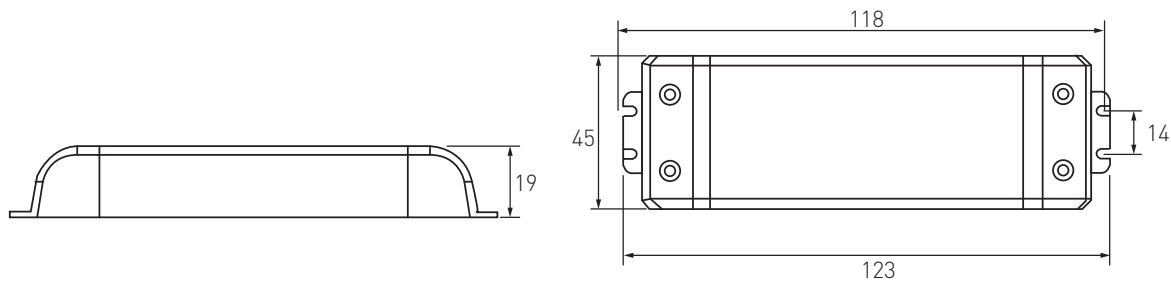

LL1x20-E-CC-500 LED driver is suited for either in-built or independent luminaire usage. In order to have safe and reliable LED driver operation, the LED luminaires will need to comply with the relevant standards and regulations (e.g. IEC/EN 60598-1). The LED luminaire shall be designed to adequately protect the LED driver from dust, moisture and pollution. The luminaire manufacturer is responsible for the correct choice and installation of the LED drivers according to the application and product datasheets. Specifications of the LED drivers may never exceed the operating conditions as per the product datasheets.

Wiring considerations

Wire type and cross section

- Please refer to datasheets connections & mechanical data

Wiring insulation

- According to recommendations in EN 60598

Maximum wire lengths

- Please refer to datasheets connections & mechanical data

Wire connections

- Please refer to datasheets connections diagram

Miniature Circuit Breakers (MCB)

- Type-C MCB's with trip characteristics in according to EN 60898 are recommended.

LED driver earthing

- LED drivers are designed to support different luminaire classifications, like Class I or Class II fittings (no earth required). Please check the individual LED driver type for its exact safety class rating.
- For Helvar LED drivers to have a reliable operation and EMC performance, the luminaires are expected to have an earth connection. Earth connection can be left out if luminaire safety is guaranteed by its construction.
- When using a SELV-rated LED driver, then the SELV driver output has to be insulated from the luminaire earth connection (ref. EN60598-1 luminaire standard).

Installation & operational considerations

Maximum tc temperature

- Reliable operation and lifetime is only guaranteed if the maximum tc point temperature is not exceeded under the conditions of use.

Strain Relief for independent use

- LL1x20-E-CC-500 LED driver allow use both inside the luminaire and outside the luminaire. The strain relief provides reliable fastening method for the mains and LED output wiring.
- Ensure that the LED driver does not exceed temperature higher than specified on the product datasheets.
- The general preferred installation position of LED drivers is to have the top cover facing upwards.